

1280F

DESCRIPTION: Large, Expanded, Flattened, Steel

SKU Range P01280	Pattern 1280F	Form Flattened
Profile Diamond	Longway Aperture (LWA) 24.38mm	Shortway Aperture (SWA) 7.11mm
Strand Width AF* (SWDT) 2.39mm	Strand Thickness AF* (STK) 1.14mm	Material Steel
Finish Mill Finish	Open Area (%) 60%	Weight (KG/EA) 10.72kg
Sheet (LWM) 2440mm	Sheet (SWM) 1220mm	

P01280	
DIAMOND	\diamond
STEEL	ST
FLATTENED	



*AF: After Flattening

If not otherwise specified, tolerances are in line with our standard factory tolerances available upon request. Due to the manufacturing processes and the nature of expanded metal, all dimensions are within nominal tolerances with no guarantee given in respect of squareness or flatness nor can we guarantee that expanded mesh will be free from surface marks, knife marks and scratches. 'LWP' and 'SWP' dimensions are measured between knuckle centres for raised mesh.

ACCREDITATIONS

With our strong heritage and experience, we pride ourselves on delivering a quality product and working to the highest possible standard. Below is just a selection of the awarding bodies and accreditors who recognise our dediction to delivering an impeccable service and rigorously tested product.



+44 (0) 1429 867 388

expandedmetalcompany.co.uk


sales@exmesh.co.uk





MESH MEASURING GUIDE

Our guide to measuring raised and flattened meshes, and mesh orientation.

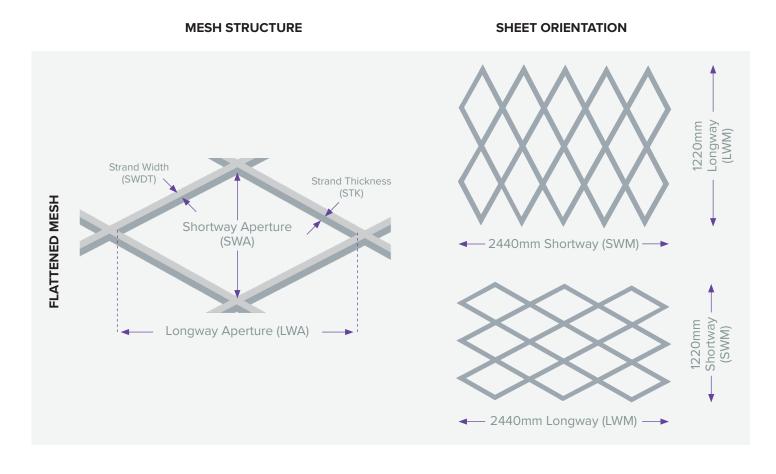

QUALITY INFORMATION

Unless otherwise specifically stated all specifications and particulars of weights and dimensions stated are approximate only and are manufactured to nominal manufacturing tolerances.

In the spirit of continuous product development and improvement, we reserve the right to change product specifications without notice.

HEALTH & SAFETY INFORMATION

COSHH

We are not aware of any risk to individuals arising from chemicals or other substances present on or in our products from reasonable usage. However, there exists the possibility of superficial injury in the form of cuts or grazes due to the nature of metal generally. Suitable PPE should be used when handling our product.

+44 (0) 1429 867 388