



THE EXPANDED METAL COMPANY

N6654F

DESCRIPTION: Small, Expanded, Flattened, Pre-galvanised Steel

TYPICAL APPLICATIONS: Acoustics; Filtration

P06654


DIAMOND



PRE-GALVANISED STEEL



FLATTENED

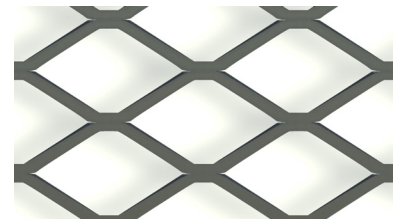

SKU Range	Pattern	Form
P06654	N6654F	Flattened
Profile	Longway Aperture (LWA)	Shortway Aperture (SWA)
Diamond	10.38mm	5.87mm
Strand Width AF* (SWDT)	Strand Thickness AF* (STK)	Material
1.21mm	0.64mm	Pre-galvanised Steel
Finish	Open Area (%)	Weight (KG/EA)
Mill Finish	72%	4.38kg
Sheet (LWM)	Sheet (SWM)	
1250mm	2500mm	

*AF: After Flattening

If not otherwise specified, tolerances are in line with our standard factory tolerances available upon request. Due to the manufacturing processes and the nature of expanded metal, all dimensions are within nominal tolerances with no guarantee given in respect of squareness or flatness nor can we guarantee that expanded mesh will be free from surface marks, knife marks and scratches. 'LWP' and 'SWP' dimensions are measured between knuckle centres for raised mesh.

ACCREDITATIONS

With our strong heritage and experience, we pride ourselves on delivering a quality product and working to the highest possible standard. Below is just a selection of the awarding bodies and accreditors who recognise our dedication to delivering an impeccable service and rigorously tested product.



+44 (0) 1429 867 388

expandedmetalcompany.co.uk


sales@exmesh.co.uk




MESH MEASURING GUIDE

Our guide to measuring raised and flattened meshes, and mesh orientation.

MESH STRUCTURE

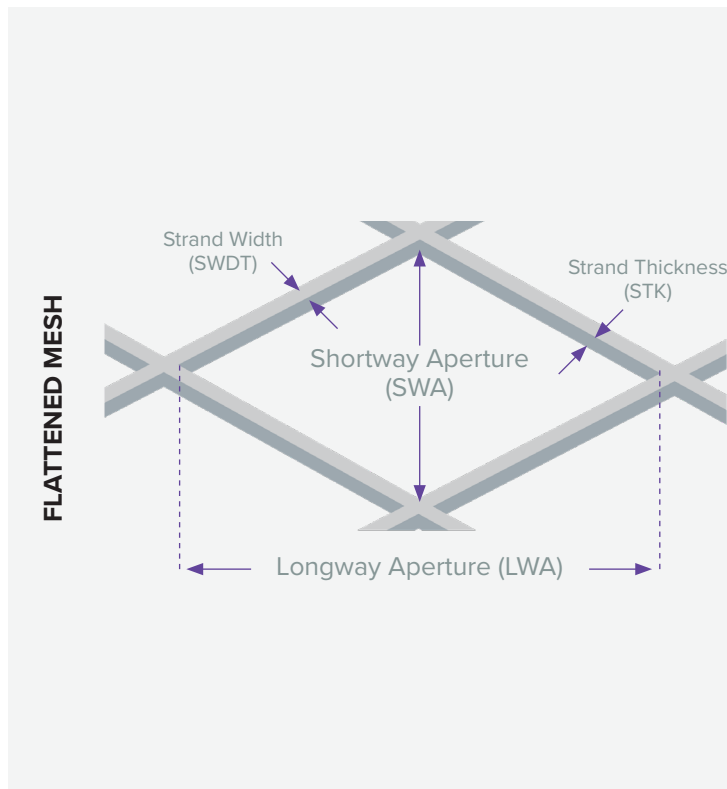

SHEET ORIENTATION

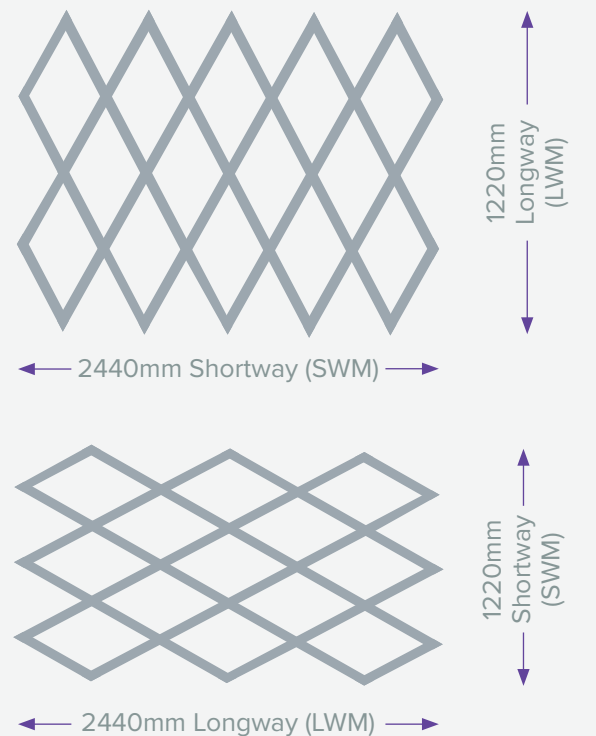

QUALITY INFORMATION

Unless otherwise specifically stated all specifications and particulars of weights and dimensions stated are approximate only and are manufactured to nominal manufacturing tolerances.

In the spirit of continuous product development and improvement, we reserve the right to change product specifications without notice.

HEALTH & SAFETY INFORMATION

COSHH

We are not aware of any risk to individuals arising from chemicals or other substances present on or in our products from reasonable usage. However, there exists the possibility of superficial injury in the form of cuts or grazes due to the nature of metal generally. Suitable PPE should be used when handling our product.