



**THE EXPANDED
METAL COMPANY**

1194TCG

DESCRIPTION: Large, Expanded, Raised, Pre-galvanised Steel

TYPICAL APPLICATIONS: Crop Drying

P01194

SLIT



PRE-GALVANISED
STEEL



RAISED



SKU Range	Pattern	Form
P01194	1194TCG	Raised
Profile	Longway Pitch (LWP)	Shortway Pitch (SWP)
Slit	28.58mm	8.17mm
Strand Width BF* (SWDT)	Strand Thickness BF* (STK)	Material
3.91mm	1.00mm	Pre-galvanised Steel
Finish	Open Area (%)	Weight (KG/EA)
Mill Finish	4%	22.33kg
Sheet (LWM)	Sheet (SWM)	
2440mm	1220mm	

*BF: Before Flattening

If not otherwise specified, tolerances are in line with our standard factory tolerances available upon request. Due to the manufacturing processes and the nature of expanded metal, all dimensions are within nominal tolerances with no guarantee given in respect of squareness or flatness nor can we guarantee that expanded mesh will be free from surface marks, knife marks and scratches. 'LWP' and 'SWP' dimensions are measured between knuckle centres for raised mesh.

ACCREDITATIONS

With our strong heritage and experience, we pride ourselves on delivering a quality product and working to the highest possible standard. Below is just a selection of the awarding bodies and accreditors who recognise our dedication to delivering an impeccable service and rigorously tested product.



+44 (0) 1429 867 388

expandedmetalcompany.co.uk

sales@exmesh.co.uk




MESH MEASURING GUIDE

Our guide to measuring raised and flattened meshes, and mesh orientation.

MESH STRUCTURE

SHEET ORIENTATION

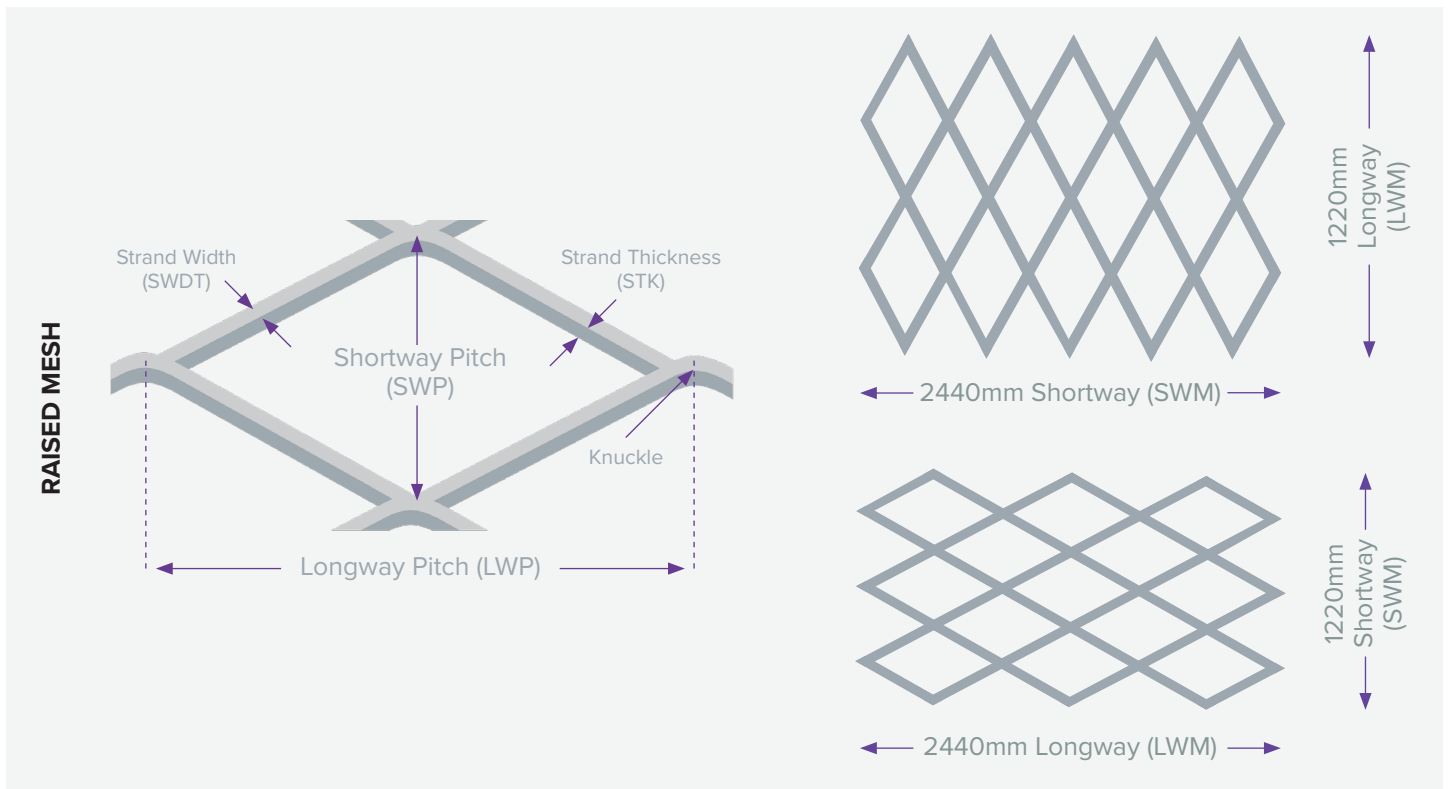

QUALITY INFORMATION

Unless otherwise specifically stated all specifications and particulars of weights and dimensions stated are approximate only and are manufactured to nominal manufacturing tolerances.

In the spirit of continuous product development and improvement, we reserve the right to change product specifications without notice.

HEALTH & SAFETY INFORMATION

COSHH

We are not aware of any risk to individuals arising from chemicals or other substances present on or in our products from reasonable usage. However, there exists the possibility of superficial injury in the form of cuts or grazes due to the nature of metal generally. Suitable PPE should be used when handling our product.